



R&S® Spectrum Rider FPH Spectrum Analyzer

Small form factor to handle big tasks



The perfect choice for

Spectrum clearance (5G ready)	Interference hunting
Pulse measurement	EMI debugging and RF design validation

Key specifications	
Frequency	5 kHz to 31 GHz
Resolution bandwidths	1 Hz to 3 MHz
DANL at 3 GHz (preamp on)	< -163 dBm
Phase noise, 100 kHz offset	105 dBc/Hz at f = 500 MHz
Battery operation time	> 6 hours
Weight	2.5 kg

Models	Supporting frequency range	
	Default range	Upgrade to
R&S®Spectrum Rider FPH		
Model .02	5 kHz to 2 GHz	3/4 GHz
Model .06	5 kHz to 6 GHz	8 GHz
Model .13	5 kHz to 13.6 GHz	20 GHz
Model .26	5 kHz to 26.5 GHz	31 GHz

Your benefit	Features
Battery life twice that of current handheld spectrum analyzers	<ul style="list-style-type: none"> > 6 hours battery life
Smartphone style capacitive touchscreen; also available with traditional interface	<ul style="list-style-type: none"> 7 inch antiglare capacitive color touchscreen On-screen keyboard Smartphone-like gestures Adjustable display brightness Large backlit button keypad Multifunction rotary knob
Buy only what you need; upgrade later without returning analyzer for servicing	<ul style="list-style-type: none"> Selection of 2 / 6 / 13.6 / 26.5 GHz base models Frequency upgrade keycode options available for each base model Keycode options for function upgrades

The three key Ps for lab and field environments

Performance – excellent DANL and phase noise

- ▶ Weak signals can be easily captured

Portability – weighs only 2.5 kg

- ▶ Carrying holster (HA-Z322) to free up hands
- ▶ Side strap included for easy transportation
- ▶ Selection of carrying cases available


Price – low starting price and optional software keycode upgrades

- ▶ Competitive and attractive price
- ▶ No downtime, no recalibration needed




For price and more information:
www.rohde-schwarz.com/catalog/FPH

Operation time

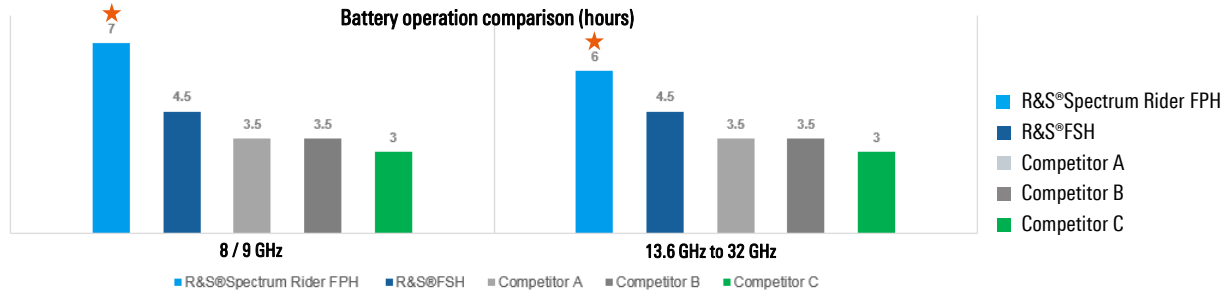


The analyzer has an innovative fanless concept – part of a rugged design that protects it from dust and water. Designed with power optimization in mind, the R&S®Spectrum Rider consumes less power than competitor products and can be operated for a full working day without recharging.

Price comparison

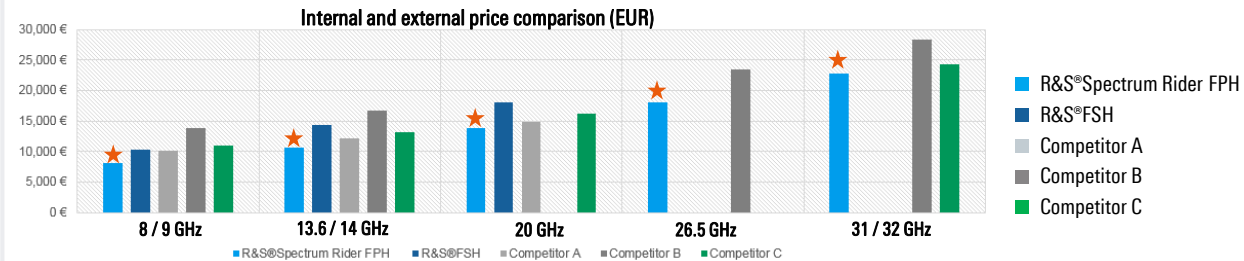

The R&S®Spectrum Rider FPH is a high-quality spectrum analyzer. Its favorable price tag lowers the barrier to entry for prospective premium analyzer owners. The unique frequency upgrade concept and software keycode options make it easy to upgrade the instrument.

Lightweight

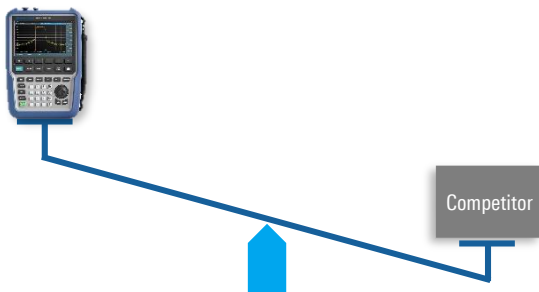

Every additional gram adds to user fatigue in the field. Thanks to the state-of-the-art design, each unit weighs only 2.5 kg – regardless of the frequency range.

Performance and features

The R&S®Spectrum Rider FPH has exceptional phase noise and DANL to capture known and unknown signals. R&S®Spectrum Rider FPH easily measures a wide range of parameters such as total harmonic distortion, occupied bandwidth, output power and channel power, making it the ideal tool for field work.

Other products to consider

- ▶ R&S®NRP power sensors – all models up to 110 GHz supported
- ▶ R&S®FSH – when you need digital modulation analysis

Ordering information

Choose your model and frequency	
Base model	
R&S®Spectrum Rider handheld spectrum analyzer, 5 kHz to 2/6/13.6/26.5 GHz	R&S®FPH
Frequency and preamplifier upgrade for 2 GHz model	
Spectrum analyzer frequency upgrade, 2 GHz to 3 GHz	R&S®FPH-B3
Spectrum analyzer frequency upgrade, 2 GHz to 4 GHz	R&S®FPH-B4
Preamplifier, 5 kHz to 4 GHz	R&S®FPH-B22
Frequency and preamplifier upgrade for 6 GHz model	
Spectrum analyzer frequency upgrade, 6 GHz to 8 GHz	R&S®FPH-B8
Preamplifier, 5 kHz to 8 GHz	R&S®FPH-B23
Frequency and preamplifier upgrade for 13.6 GHz model	
Spectrum analyzer frequency upgrade, 13.6 GHz to 20 GHz	R&S®FPH-B20
Preamplifier, 5 kHz to 20 GHz	R&S®FPH-B24
Frequency and preamplifier upgrade for 26.5 GHz model	
Spectrum analyzer frequency upgrade, 26.5 GHz to 31 GHz	R&S®FPH-B31
Preamplifier, 5 kHz to 31 GHz	R&S®FPH-B25
Popular options/accessories	
Description	
Power sensor support	R&S®FPH-K9
Channel power meter	R&S®FPH-K19
Pulse measurements with power sensor	R&S®FPH-K29
Interference analysis	R&S®FPH-K15
Signal strength mapping	R&S®FPH-K16

Accessories: All models include a lithium-ion battery pack, side strap for hand, USB cable, power cord and three-year warranty.

Languages supported: English, German, French, Spanish, Russian, simplified and traditional Chinese, Korean and Japanese.



deg-Messtechnik GmbH
Brüdergasse 1-3, Top B14
A-3430 Tulln
fon +43 2272 20522-0
fax +43 2272 20522-17

Internet <http://www.deg-messtechnik.at>

Rohde & Schwarz GmbH & Co. KG | Europe, Africa, Middle East +49 89 4129 12345 | North America 1 888 TEST RSA (1 888 837 87 72)

Latin America +1 410 910 79 88 | Asia Pacific +65 65 13 04 88 | China +86 800 810 82 28 / +86 400 650 58 96

www.rohde-schwarz.com | customersupport@rohde-schwarz.com

R&S® is a registered trademark of Rohde & Schwarz GmbH & Co. KG | PD 5214.9380.32 | Version 02.10 | April 2020 (as)

Trade names are trademarks of the owners | R&S®Spectrum Rider FPH | Data without tolerance limits is not binding

Subject to change | © 2020 Rohde & Schwarz GmbH & Co. KG | 81671 Munich, Germany